
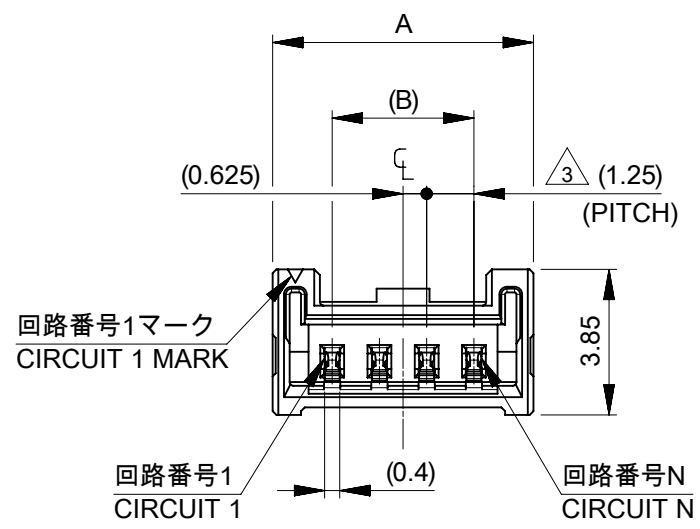
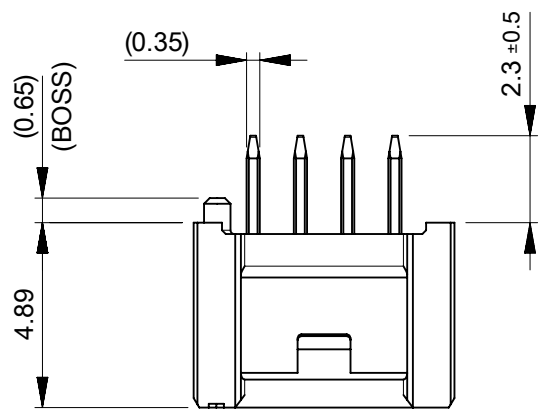


トレードマーク
TRADE MARK

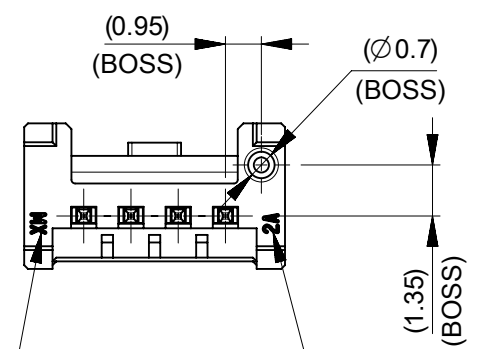

- 注記 :
NOTES :
- 1 材質及び仕上げ(めっき仕様) : TABLE 1参照
MATERIAL AND FINISHES (PLATING SPECIFICATION) : SEE TABLE 1
 - 2 製品仕様書、コネクタ取扱説明書、適合嵌合相手はSHEET 3をご参照ください。
PLEASE REFER TO SHEET 3 FOR PRODUCT SPECIFICATION, APPLICATION SPECIFICATION AND MATE WITH.
 - 3 偶数極に適用
APPLY TO EVEN CIRCUIT
 - 4 発注番号 : SHEET 3 参照
ORDER NUMBER : PLEASE REFER TO SHEET 3

220097**7*


NO.	ハウジングカラー HOUSING COLOR
0	ナチュラル(白) NATURAL (WHITE)
1	黒 BLACK


極数
CIRCUIT SIZE

-	22	18.75	21.9	16
-	20.75	17.5	20.65	15
-	19.5	16.25	19.4	14
-	18.25	15	18.15	13
-	17	13.75	16.9	12
-	15.75	12.5	15.65	11
-	14.5	11.25	14.4	10
14.45	13.25	10	13.15	9
13.2	12	8.75	11.9	8
11.95	10.75	7.5	10.65	7
10.7	9.5	6.25	9.4	6
9.45	8.25	5	8.15	5
8.2	7	3.75	6.9	4
6.95	5.75	2.5	5.65	3
5.7	4.5	1.25	4.4	2
D	C	B	A	極数 CIRCUIT SIZE


1 TABLE 1

番号 NO.	部品 PART	材質 MATERIAL
1	ハウジング HOUSING	ポリアミド(PA), ガラス充填, UL94V-0, 色 : SHEET 3参照 POLYAMIDE (PA), GLASS FILLED, UL94V-0, COLOR : SEE SHEET 3
2	ターミナル TERMINAL	黄銅 BRASS 錫ピスマスめっき : 1.0 MICROMETER MINIMUM TIN-BISMUTH PLATING ニッケルめっき (下地めっき) : 1.0 MICROMETER MINIMUM NICKEL PLATING (UNDERPLATING)
DOCUMENT STATUS		P1 RELEASE DATE 2023/09/12 06:08:42

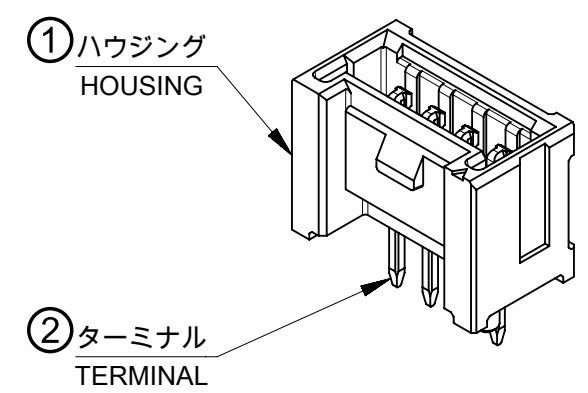


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						CIRCUIT SIZE											
DIMENSION UNITS		SCALE		CURRENT REV DESC:				molex MICRO-LOCK PLUS 1.25 W/B SIGNLE ROW VERTICAL THROUGH HOLE PLUG ASSEMBLY WITH BOSS LOW HALOGEN TIN-BISMUTH PLATING									
mm		NTS															
GENERAL TOLERANCES (UNLESS SPECIFIED)																	
ANGULAR TOL		± 3.0 °															
4 PLACES		± 0.2		EC NO: 757367													
3 PLACES		± 0.2		DRWN: SOKUMURA01		2022/06/21											
2 PLACES		± 0.2		CHK'D: SAKIYAMA		2023/09/12											
1 PLACE		± 0.2		APPR: AIDA		2023/09/12											
0 PLACES		± 0.2		INITIAL REVISION:													
				DRWN: SOKUMURA01		2022/06/21											
				APPR: AIDA		2023/09/12											
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
								A3-SIZE		220097		SEE SHEET 3		GENERAL		1 OF 3	


製品形状
PRODUCT SHAPE




2-11極
2-11 CIRCUIT

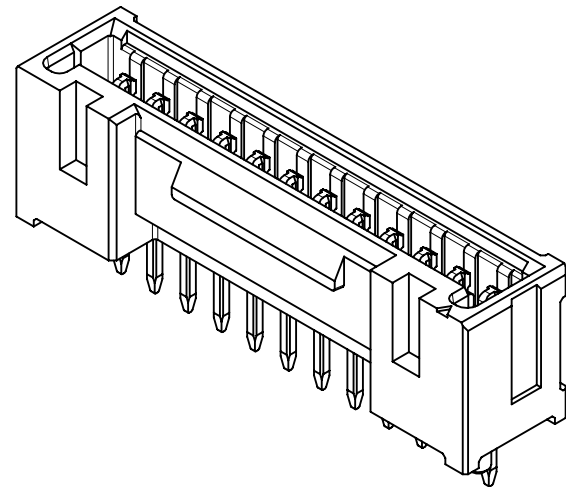

12-13極
12-13 CIRCUIT

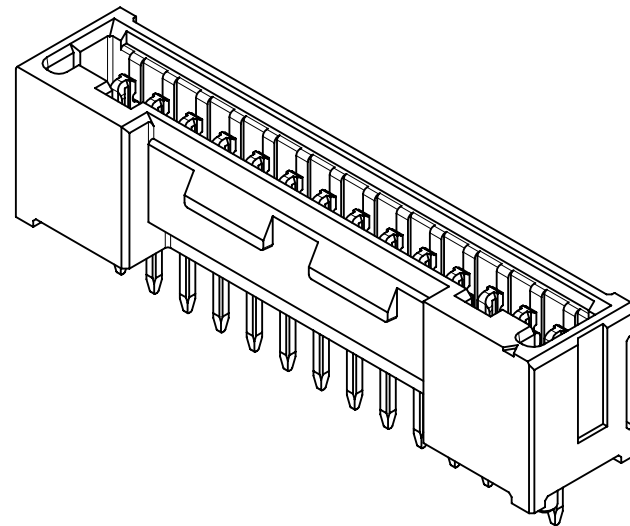


14極
14 CIRCUIT

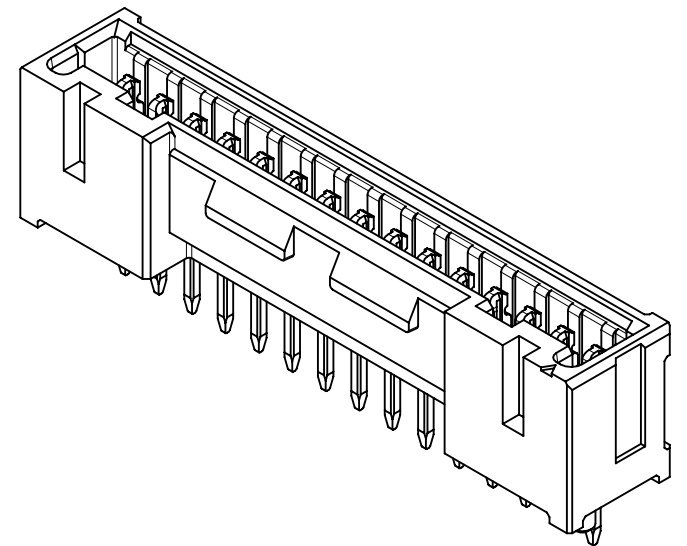

15-16極
15-16 CIRCUIT



嵌合状態図
MATED CONNECTORS

△₂ 嵌合相手：204532シリーズ
MATE WITH：204532 SERIES

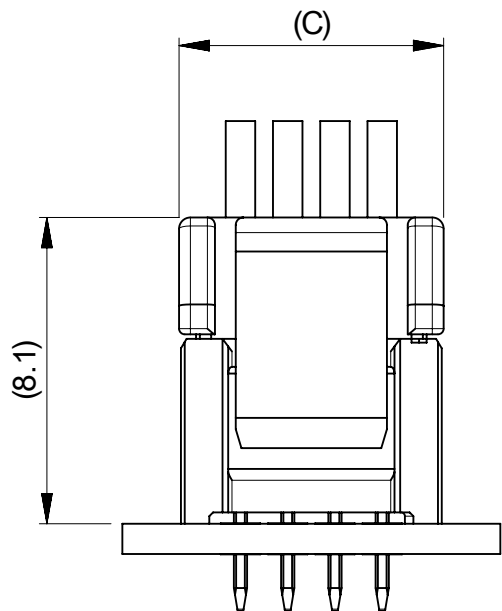


△₂ リテーナー：214528シリーズ
RETAINER：214528 SERIES

△₂ 嵌合相手：214526シリーズ
MATE WITH：214526 SERIES

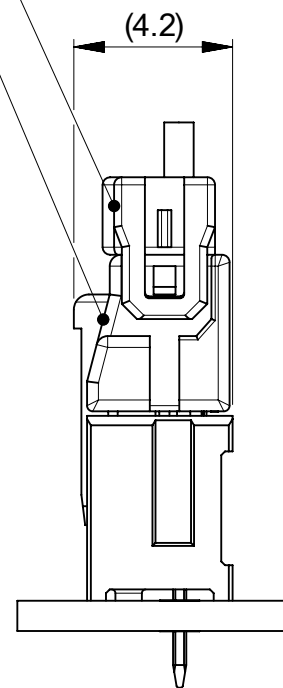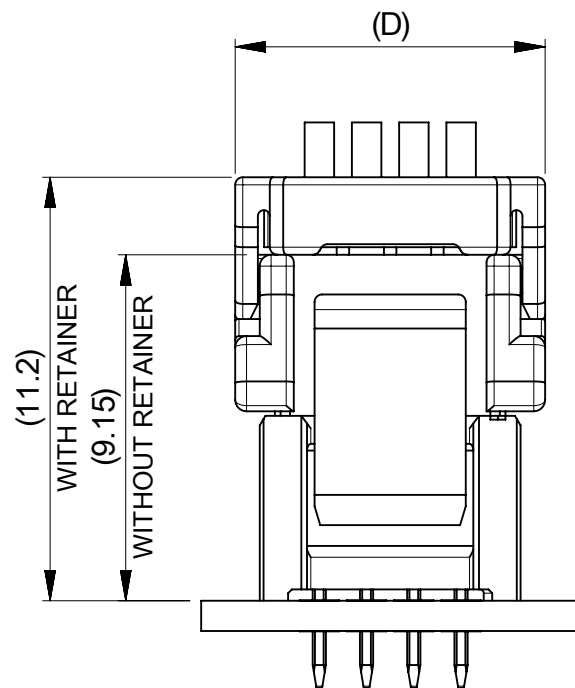

推奨基板レイアウト
RECOMMENDED PCB PATTERN LAYOUT

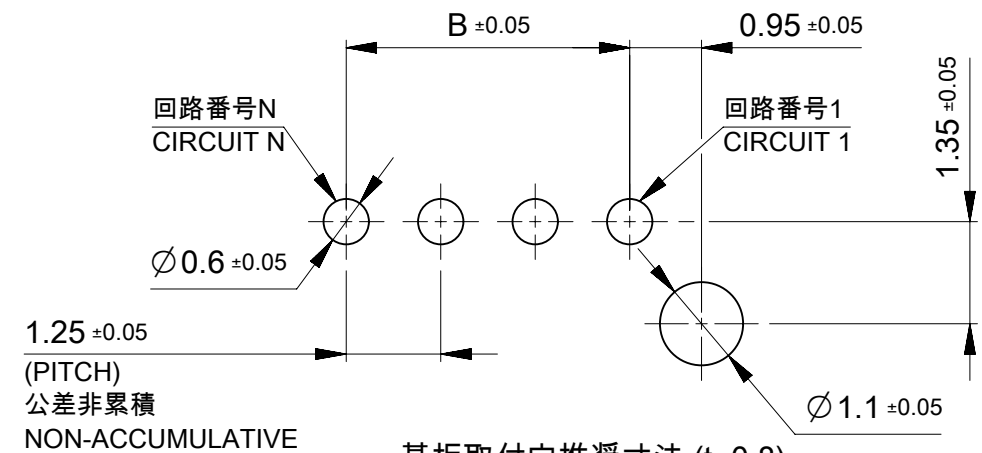

基板取付穴推奨寸法 (t=0.8)
RECOMMENDED PCB HOLE DIMENSION (t=0.8)

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex								
mm		NTS													
GENERAL TOLERANCES (UNLESS SPECIFIED)				MICRO-LOCK PLUS 1.25 W/B SIGNLE ROW VERTICAL THROUGH HOLE PLUG ASSEMBLY WITH BOSS LOW HALOGEN TIN-BISMUTH PLATING											
ANGULAR TOL ± 3.0 °															
4 PLACES		± 0.2		EC NO: 757367			PRODUCT CUSTOMER DRAWING								
3 PLACES		± 0.2		DRWN: SOKUMURA01 2022/06/21											
2 PLACES		± 0.2		CHK'D: SAKIYAMA 2023/09/12											
1 PLACE		± 0.2		APPR: AIDA 2023/09/12			DOCUMENT NUMBER			DOC TYPE		DOC PART		REVISION	
0 PLACES		± 0.2		INITIAL REVISION:											
DRWN: SOKUMURA01 2022/06/21				APPR: AIDA 2023/09/12			PSD		000		A				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						A3-SIZE		220097		SEE SHEET 3		GENERAL		2 OF 3	

